


Installation Example in asphalted areas Class D 400 - F 900

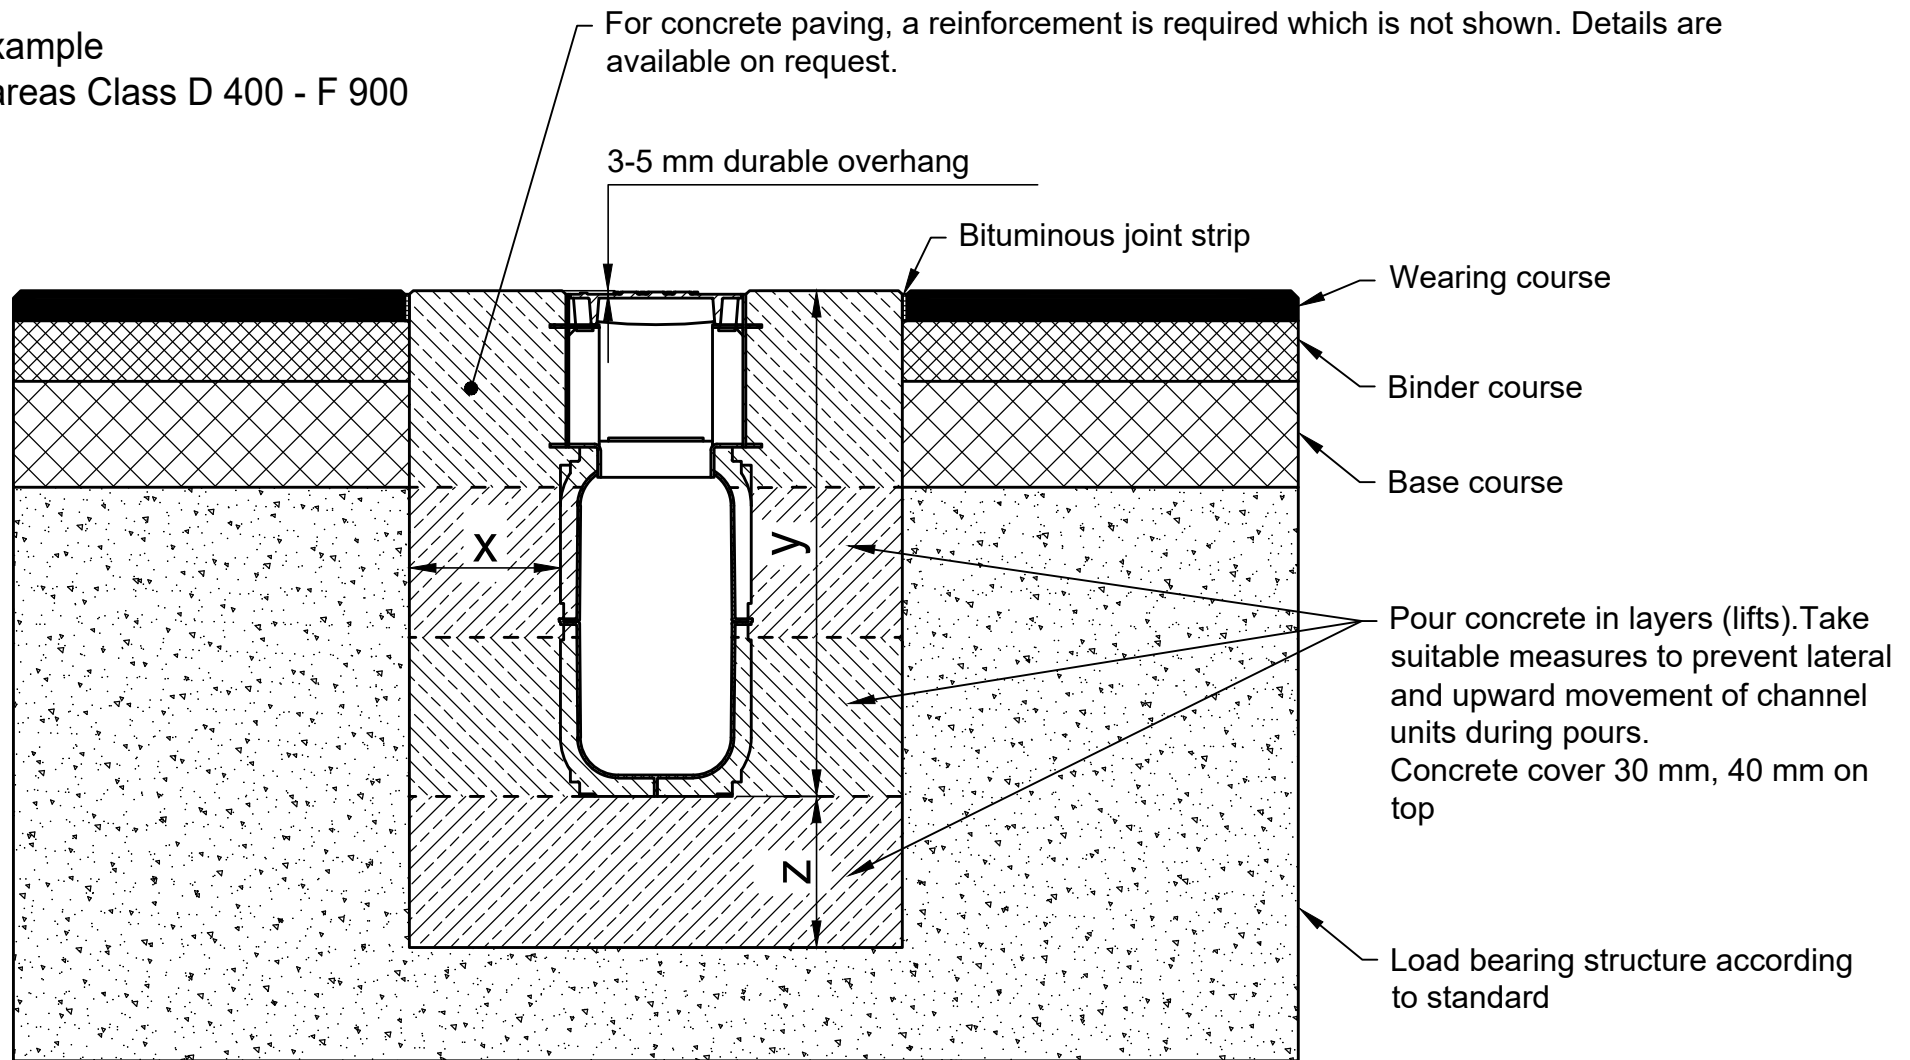

* y = Component height plus camber

Reinforcement see reinforcement drawing 0000122601

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600**	F 900**
Foundation: width x / height y / thickness z (in cm)					20 / * / 20	20 / * / 20	20 / * / 20
EN 206-1 / DIN 1045-2 The named concrete quality is a minimum quality	quality of concrete stretcher				C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2
	without danger of frost on the lateral support				C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2
	with danger of frost on the lateral support				C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2

Applying to following systems:

RECYFIX HICAP 5200 Access Element

The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary.

The installation example represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account.

** Installation situations of drainage systems with high dynamic loads (e.g. airports, motorways and manoeuvring areas of buses, lorries and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions.

Date: 18.01.2022

Our general installation instructions apply.

Format DIN A4
scale 1:10

EBBw

0000121272_BRITISH.dwg

15

RF-HICAP-5200 Typ 465 mit Revi Aufsatz H200 Einbaubeispiel Klasse E 600 in Asphalt

hauraton
Unit 4, Frenchs Avenue
LU6 1BH Dunstable /
Bedfordshire
United Kingdom
Tel. +44 1582 501380
TS-UK@hauraton.com