



Installation Example  
Concrete Class D 400 - E 600

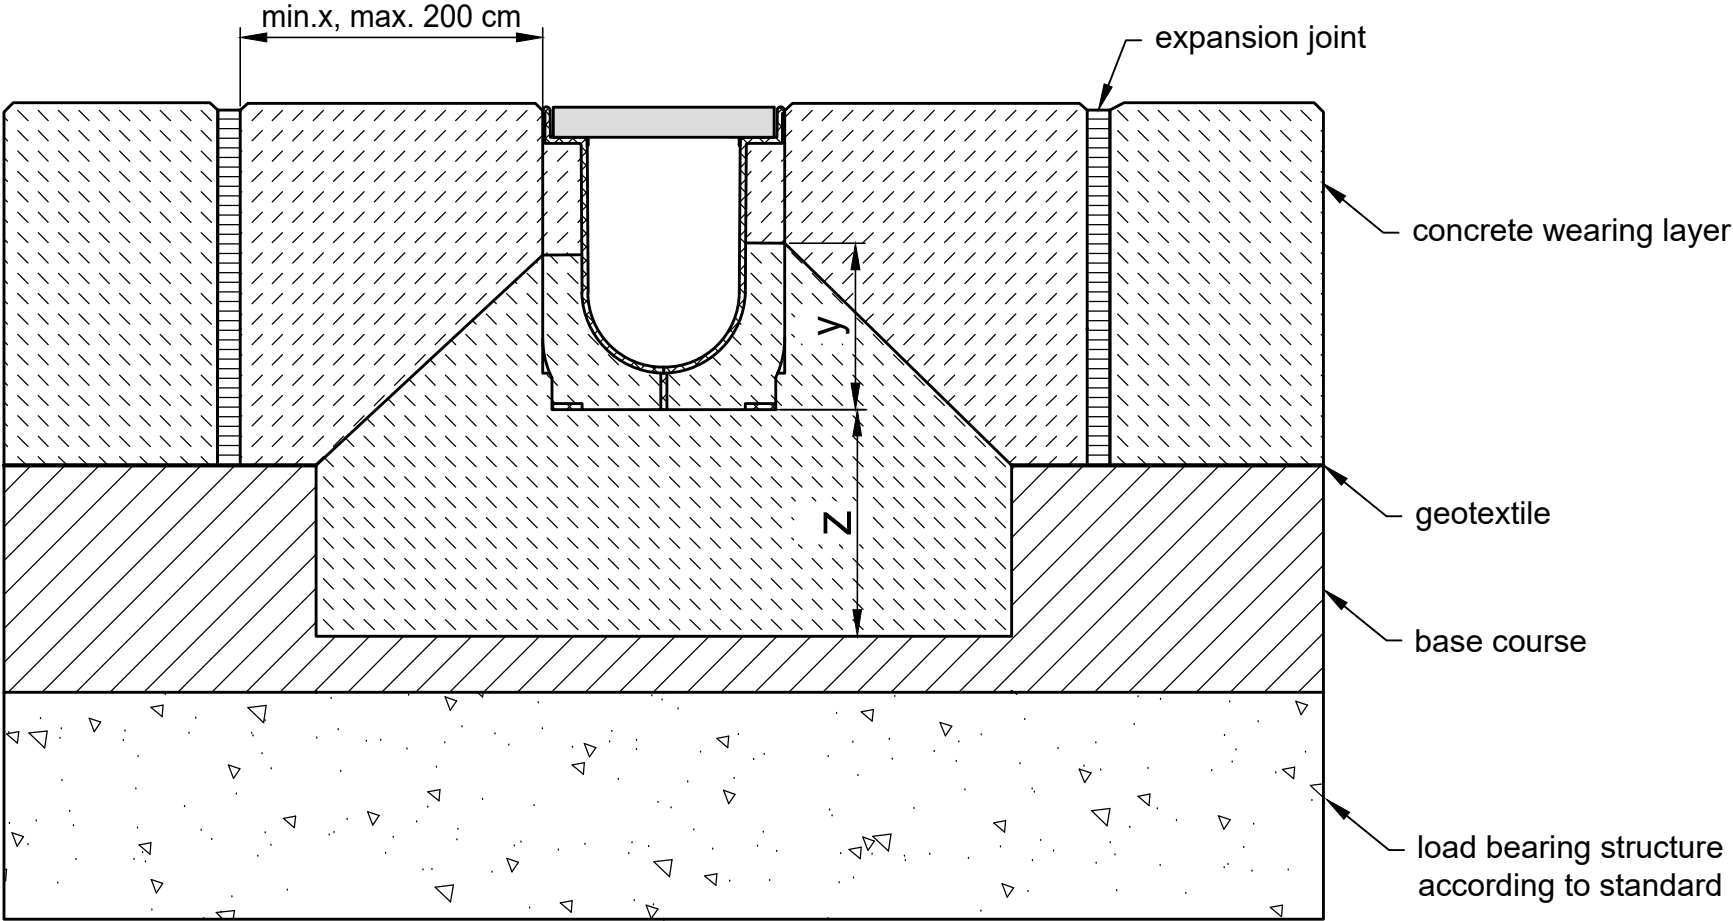

\* y = Channel height plus camber

|   |  |      |       |                               |                |  |         |  |      |  |  |
|---|--|------|-------|-------------------------------|----------------|--|---------|--|------|--|--|
| Category according to EN 1433 / DIN 19580   |  | A 15 | B 125 | C 250                         | D 400**        | E 600**                                      | F 900** | Applying to following systems:<br><br><b>RECYFIX NC 100, 150, 200, 300</b><br><b>Channel height ≥ 150 mm</b> |      |  |  |
| Foundation: width x / height y / thickness z (in cm)  |  |      |       |                               | 15 / * / 15    | 15 / * / 20                                  |         |  |      |  |  |
| EN 206-1 /<br>DIN 1045-2<br><br>The named concrete quality<br>is a minimum quality  | quality of concrete stretcher                  |      |       |                               | C30/37 XF4,XM1 | C30/37 XF4,XM1                               |         |  |      |  |  |
|   | without danger of frost on the lateral support |      |       |                               | C25/30 X0      | C25/30 X0                                    |         |  |      |  |  |
|   | with danger of frost on the lateral support    |      |       |                               | C25/30 XF3     | C25/30 XF3                                   |         |  |      |  |  |
| The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at <a href="http://www.hauraton.com">www.hauraton.com</a> In building construction is a sealing layer below the channels necessary.<br><br>The installation example represents a proven recommendation of the HAURATON company. The final responsibility for the design of e.g. expansion joints or the suitable load transfer is with the responsible planner, the responsibility for the execution is with the contractor.<br><br>* Installation situations of drainage systems with high dynamic loads (e.g. airports, motorways and manoeuvring areas of buses, lorries and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions. |  |      |       | Date: 14.03.2025              |                | Our general installation instructions apply. |         | Format DIN   | A4   | <br>Unit 4, Frenchs Avenue<br>LU6 1BH Dunstable /<br>Bedfordshire<br>United Kingdom<br><br>Tel. +44 1582 501380<br>TS-UK@hauraton.com |  |
|   |  |      |       |                               |                |  |         | scale  | 1:5  |  |  |
|   |  |      |       | 0000049541_BRITISH.dwg        |                |  |         | 10   | EBBw |  |  |
|   |  |      |       | RF NC 100 Ri Typ 010 Kl. D400 |                |  |         |  |      |  |  |